



# GOLAN PRODUCTS, INC.

16003 South Broadway Gardena, CA 90248 Tel. 310-630-5858 Fax. 310-630-1666

## INSTALLATION INSTRUCTIONS BILLET FUEL FILTER

Install this fuel filter in the fuel line between fuel tank and engine's fuel intake system. Select the most accessible location for ease of installation and servicing. Filter does not need to be close to the fuel intake system.

### FLEXIBLE FUEL LINES:

- 1) Cut a 3" section out of the fuel line at a point selected.
- 2) Mount filter clamp to rigid panel to secure filter in place.
- 3) Thread or slip (barbed end) fitting onto fuel line until just past finger tight. (1/16" turn)  
NOTE: Be sure fuel flow markings are in correct position. It is also recommended to use the proper hose clamps on barbed ends.
- 4) Check tightness of end caps.
- 5) Start engine and check for leaks.

### RIGID FUEL LINES:

- 1) Mark a 4-1/2" section of the fuel line to be removed.
- 2) Cut out section marked. (For best results, remove complete line.)
- 3) Remove burrs from tubing and clean metal particles from line.
- 4) Install pressure nuts, (not provided), or flare ends of line to make a bead or flare.
- 5) Replace fuel line, (if removed in Step 2).
- 6) Mount filter clamp to rigid panel to secure filter in place.
- 7) Thread or slip (barbed end) fitting onto fuel line until just past finger tight. (1/16" turn)  
NOTE: Be sure fuel flow markings are in correct position.
- 8) Check tightness of end caps.
- 9) Start engine and check for leaks.

### SERVICING THE FUEL FILTER:


- 1) Remove the filter from the line. (See Caution)
- 2) Unscrew the end fitting.
- 3) Remove pleated filter disc and back flush with same fuel used for filter.  
NOTE: For better results, use air gun.
- 4) Replace pleated filter disc and tighten end fitting. Tighten until just past finger tight.  
DO NOT OVER TIGHTEN.
- 5) Replace filter in fuel line.
- 6) Start engine and check for leaks.

### WARRANTY:


Billet Fuel Filter is warranted against defects in design, material and workmanship for one year from date of purchase when installed according to directions on this sheet.

### CAUTION:

- 1) When installing or cleaning fuel filter, be sure there are no sparks or open flames in area.
- 2) Allow engine to cool to reduce danger of flash fire if leakage or spillage of fuel should occur.
- 3) Fuel filter must be mounted greater than 4" from the exhaust system, engine manifold or any other part on the vehicle that may cause the fuel in the filter to ignite.

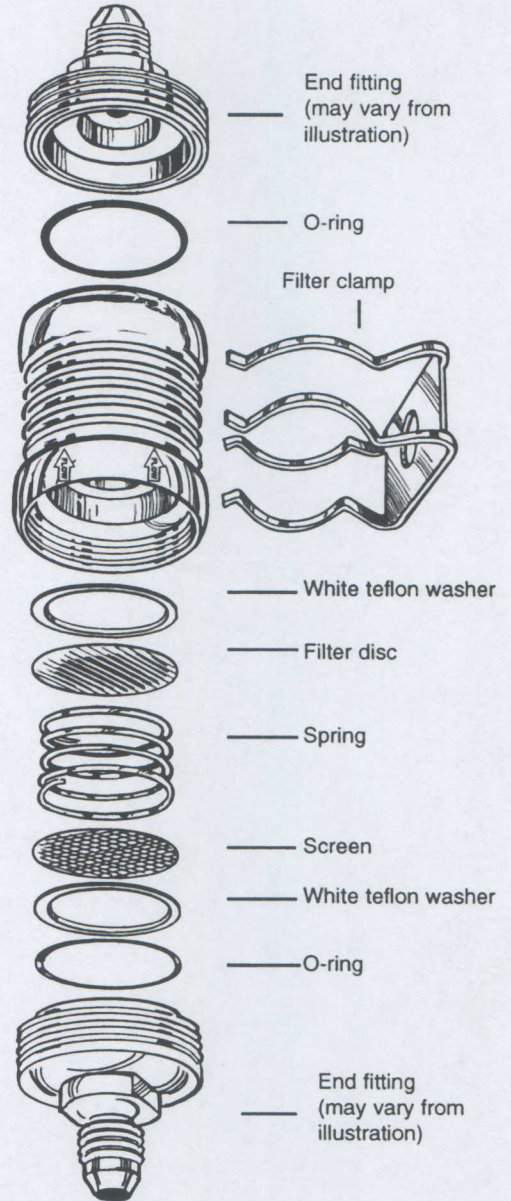

### ASSEMBLY FOR FILTER, WITH BYPASS: RACING OPTION

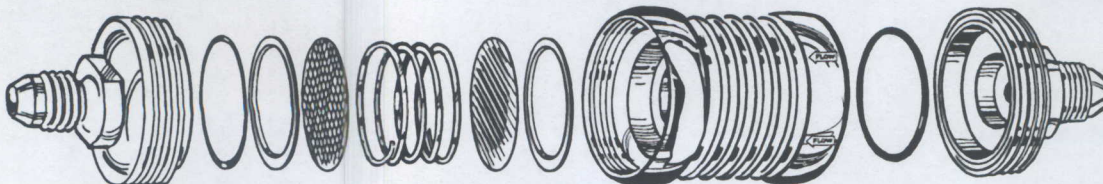

- End fitting
- O-ring
- White Teflon washer
- Screen
- Spring
- Filter disc
- White teflon washer
- Body
- O-ring
- End fitting