


## CYLINDER HEAD TEMPERATURE/CYLINDER HEAD TEMPERATURE

Illustration of Instrument Connection:

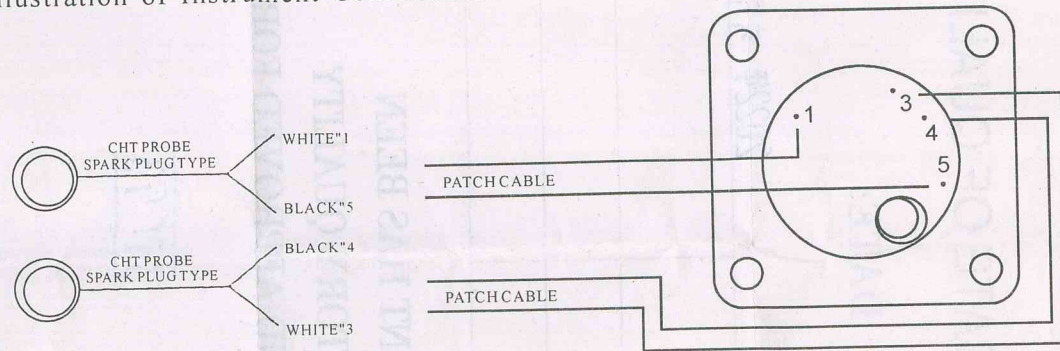

### NOTE:

- 1) When installing the instrument from behind the panel use a 2/4" hole. When installing the unit from in front of the panel use a 2/16" hole. Use 4"40 screws to hold instrument secure.
- 2) Mount at least 12" away from compass.
- 3) This unit has not been approved for type certified aircraft.
- 4) Do not connect instrument to any other power source. damage may occur.
- 5) If no reading, reverse connections.